

---

---

# **YRiS**    **Yellow River Studies**

## *News Letter Vol.3*

October 1, 2004

---

---

I.	Installation of ABL observation system on the “Changwu Agro-Ecological Experimental Station” .....	2
II.	Bohai Sea Study Project .....	8
III.	Precise regional groundwater table measurements at the Yellow River Delta .....	10
IV.	Some unique results on interaction of groundwater and surface water in the Yellow River delta .....	14
V.	List of related meetings .....	20

---

---

# **Installation of ABL observation system on the “Changwu Agro-Ecological Experimental Station”**

**Tetsuya HIYAMA<sup>1)</sup>, Atsushi HIGUCHI<sup>1)</sup>, Atsuhiko TAKAHASHI<sup>2)</sup>,  
Masanori NISHIKAWA<sup>1)</sup>, Wei LI<sup>1)</sup>, Wenzhao LIU<sup>3)</sup>  
and Yoshihiro FUKUSHIMA<sup>2)</sup>**

1) *Hydrospheric Atmospheric Research Center (HyARC), Nagoya University, Japan*

2) *Research Institute for Humanity and Nature, Japan*

3) *Institute of Soil and Water Conservation, China*

## **1. Introduction**

The purposes of the observation for atmospheric boundary layer (ABL) over the Loess Plateau are to detect exchange processes in momentum, heat, water, and CO<sub>2</sub> among land - vegetation - atmosphere system, and to re-evaluate water cycle system over Loess Plateau.

We will analyze atmospheric turbulence in the ABL and get seasonal variations in surface fluxes of momentum, heat, water, and CO<sub>2</sub> on the Plateau. We will also use satellite remote sensing data also to diagnose the land surface conditions around the target region. Analyzing processes in development of convective boundary layer (CBL) and generation of cumulus clouds using a “cloud resolving model” on the basis of the ABL observation data is our final target, too. Namely, the improvements of parameterizations schemes in the processes of ABL, cloud physics, and precipitation systems over a dry and high altitude region will be our final goals.

In order to achieve the purposes, we established ABL observation system at the “Changwu Agro-Ecological Experimental Station, Chinese Academy of Science (CAS)” located at southern part of Loess Plateau, in the middle of May 2004.

## **2. Installed Devices**

The ABL observation system consists of;

- 1) Wind Profiler Radar (WPR)
- 2) Flux and Radiation Observation System (FROS).

Next Japanese fiscal year (after April 2005), we will install;

- 3) Microwave Radiometer (MR).



Fig. 1 The 30-m high tower established on the field of "Changwu Agro-Ecological Experimental Station".



Fig. 2 A set of ultra-sonic anemometer-thermometer and infrared H<sub>2</sub>O/CO<sub>2</sub> gas analyzer installed on the tower.

The ABL measurement system was (and will be) established at the meteorological field of the "Changwu Agro-Ecological Experimental Station" on Loess Plateau located at N35 ° 12', E107 ° 40'. The FROS measurements include the surface flux observations of momentum, sensible heat, latent heat (water vapor), and CO<sub>2</sub>. For FROS operation, we have established a 30-m high flux tower on the center of the research field (Fig.1), on which three sets of ultra-sonic anemometer-thermometers and infrared H<sub>2</sub>O/CO<sub>2</sub> gas analyzers were installed (Fig.2). Especially, fine resolution (both in time and in spectral) radiation measurement system was included as a part of FROS (Fig.3). Those installation height/depth are shown in Table 1. The data obtained from this radiation system will be used for the improvement of local surface characteristics of optical satellite measurements.



Fig. 3 The radiation measurement system installed on the ground surface. A set of ultra-sonic anemometer-thermometer and infrared H<sub>2</sub>O/CO<sub>2</sub> gas analyzer are also shown.

Also included in the ABL observations are the profile measurements of three-dimensional wind speed components (using WPR; Fig.4), air temperature, and absolute humidity (using MR) in and around 10 minutes interval. The WPR data were partly obtained after the establishment (Fig.5).



Fig. 4 Wind profiler radar (WPR) and its observation shelter.

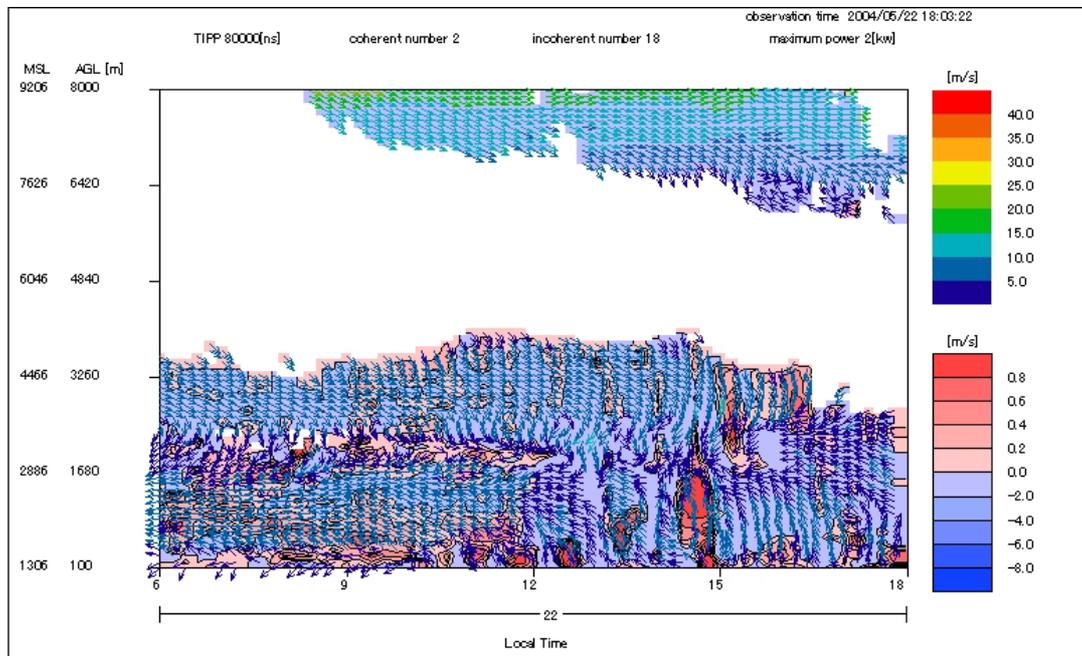


Fig. 5 An example of diurnal variation in profiles of three-dimensional wind speed obtained from the WPR.

### **3. Schedule**

The observations will be carried out continuously from 2004 to 2007 (more than three years). Descriptions described below are the finished and planned schedules for the establishment of the ABL observation system.

- 1) Construction of basement (finished)  
November, 2003 ~ March, 2004
- 2) Transportation of WPR and FROS from Japan to China (finished)  
February ~ April, 2004
- 3) Establishment of WPR and FROS (finished)  
May, 2004
- 4) Observation  
May, 2004 ~ August, 2007
- 5) Transportation of MR (planned)  
April, 2005
- 6) Establishment of MR (planned)  
May, 2005
- 7) Withdrawal of all devices (planned)  
August, 2007
- 8) Transportations of WPR, FROS and MR from China to Japan (planned)  
August ~ October 2007

### **4. Expected Results**

As one of the product, we can obtain plenty of data sets from the ABL observation system. Flux data set will be opened for the FluxNet community in worldwide. These obtained data sets can be used for the re-evaluation of parameters on ABL turbulence, entrainment process, and cloud physics in cloud-layers, using a cloud resolving model (CRM). Improved parameterization schemes can be added to some regional climate models (RCMs) and re-evaluation of water cycle system in the Yellow River Basin can be achieved. These new parameterizations are possible to apply hopefully for the re-evaluation of water cycle system in the Yellow River Basin.

Table 1 Installation height/depth of FROS.

Stage	Equipment	Height / Depth
30-m	Ultrasonic Anemo.-Thermometer	31.75 m
	Infrared CO <sub>2</sub> /H <sub>2</sub> O Gas Analyzer	31.75 m
	3-Cup Anemometer	31.45 m
	Wind Direction Sensor	31.57 m
	HUMICAP (Vaisala)	30.97 m
	Infrared Thermometer	31.23 m
10-m	Ultrasonic Anemo.-Thermometer	12.17 m
	Infrared CO <sub>2</sub> /H <sub>2</sub> O Gas Analyzer	12.17 m
	3-Cup Anemometer	11.92 m
	HUMICAP (Vaisala)	10.52 m
2-m	Ultrasonic Anemo.-Thermometer	1.86 m
	Infrared CO <sub>2</sub> /H <sub>2</sub> O Gas Analyzer	1.86 m
	3-Cup Anemometer	1.65 m
	HUMICAP (Vaisala)	1.90 m
	Infrared Thermometer	2.35 m
	Barometer (Air Pressure Sensor)	2.00 m
Underground	Soil Heat Flux Plate (x 2)	5, 5 cm
	Soil Temperature (x 5)	2, 10, 20, 40, 80 cm
	Soil Moisture Sensor (TDR) (x 6)	2, 2, 10, 20, 40, 80 cm
Radiation	S <sub>g</sub> , S <sub>d</sub> , L <sub>g</sub> , L <sub>d</sub> , PAR <sub>g</sub> , PAR <sub>d</sub>	2.50 m
	SpectroRadiometer	2.50 m
	Direct Solar Radiation	0.5 m
Precipitation	Tipping Bucket Rain Gauge	0.4 m

# Bohai Sea Study Project

Tetsuo Yanagi

Research Institute for Applied Mechanics, Kyushu University

The intensive field observation was carried out at 15 stations in the southern part of the Bohai Sea (shown in Fig.1) from 14 September to 19 September 2004 using two fishing boats, one of which is shown in Fig.2. CTD, ADCP and sun photon observations were conducted at 15 stations using one fishing boat. Water sampling for biochemical parameters such as nutrients, chlorophyll *a*, suspended sediments, DO, pH, TN, TP and so on was also conducted at 15 stations using another fishing boat. In addition to such horizontal and vertical distribution observations, continuous CTD measurement every hour, continuous water sampling every two hours and continuous ADCP observation every one minute were carried out at Sta.7 during 27 hours from 11:00 PM 15 September to 2:00 AM 17 September 2004.

Field observation was successfully finished and the data analysis is conducting now. The obtained data will be used to clarify the physical, chemical and biological characteristics of the Bohai Sea related to the Yellow River discharge and to verify the hydrodynamic and ecosystem models which are under developing now.

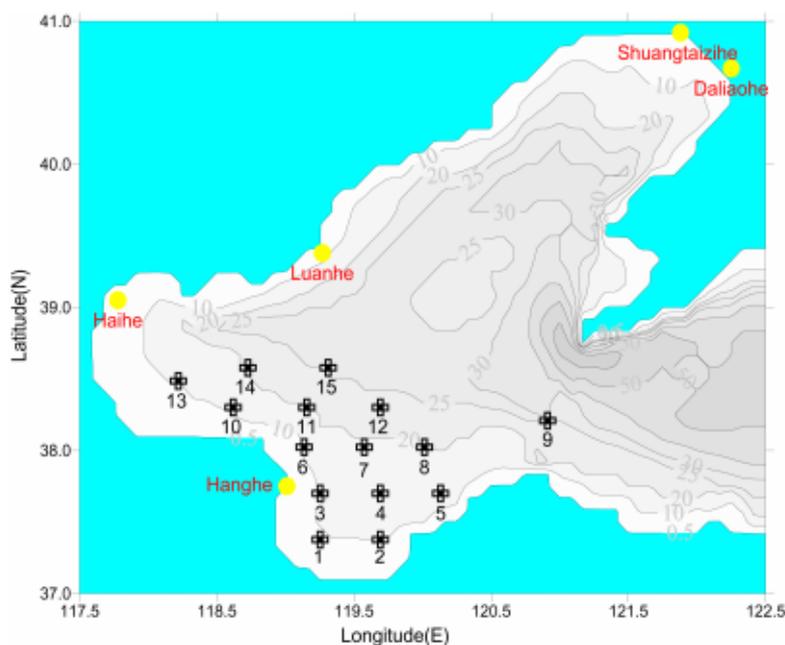


Fig.1 Observation stations in the southern part of the Bohai Sea



**Fig.2 Fishing boat for the field observation in the Bohai Sea**

# Precise regional groundwater table measurements at the Yellow River Delta

Tomochika Tokunaga<sup>1</sup>, Katsuro Mogi<sup>1</sup>, Kyosuke Onishi<sup>1</sup>, Guanqun Liu<sup>2</sup>, Shin-ichi Onodera<sup>3</sup>, Kunihide Miyaoka<sup>4</sup> and Makoto Taniguchi<sup>5</sup>

1: Department of Geosystem Engineering, University of Tokyo, Japan

2: Ocean University of China, P. R. China

3: Faculty of Integrated Sciences, Hiroshima University, Japan

4: Faculty of Education, Mie University, Japan


5: Research Institute of Humanity and Nature, Japan

## 1. Introduction

The interactions among river water, groundwater, and sea water have been considered to be one of the important processes to evaluate the water and nutrient budgets from land to sea (e.g., Taniguchi et al., 2002; Burnett et al., 2003). To better understand the interaction among the Yellow River water, groundwater, and sea water at the Yellow River Delta area, it is necessary to quantify the regional groundwater table in the region. In this preliminary study, we conducted the static GPS survey and water table measurements to delineate the regional groundwater table.

## 2. Static GPS survey and comparison with DEM data


We first conducted the static GPS survey for more than twenty-five points to obtain the elevation data in the studied area (Figs. 1 & 2). Then, the obtained data were compared with three-arc-seconds (about 90 m) DEM data

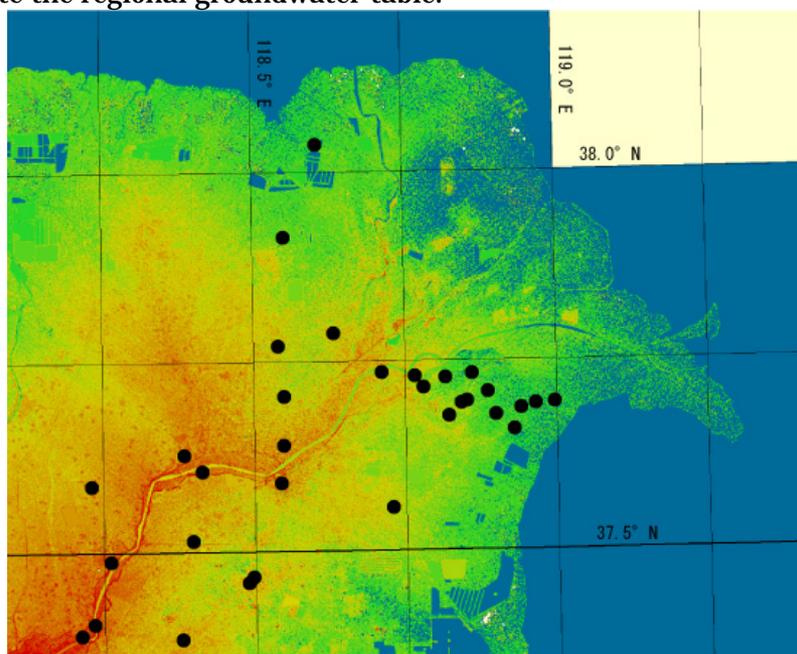

**Fig.1** Topographic map of the Yellow River delta constructed using 3-arc-seconds DEM data obtained by SRTM. Dots indicate the locations where the static GPS survey was conducted.



**Fig. 2** Static GPS survey.

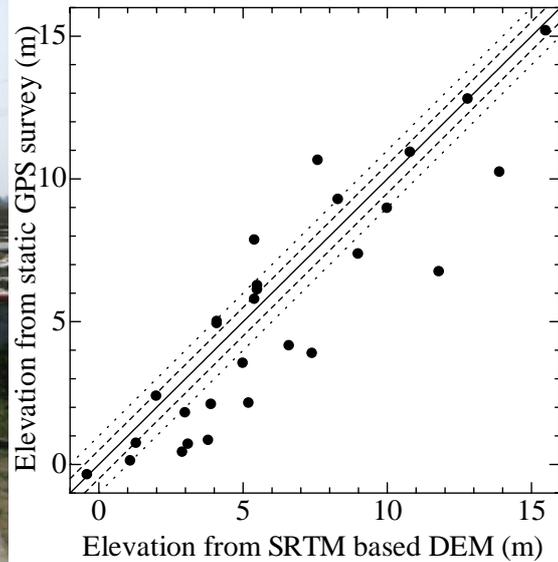

**Fig. 3** Comparison between DEM elevations and GPS elevations. Line shows 1 to 1 correlation, dashed line deviations of  $\pm 0.5$  m, and dotted line that of  $\pm 1$  m, respectively.


(Fig. 1) produced by SRTM (Shuttle Radar Topography Mission), which is the best available DEM data in the studied area. The DEM data tend to show higher elevation (more than three meters difference at several locations) compared with the GPS data (Fig. 3), suggesting that the three-arc-seconds DEM data are not detailed enough to use as the base map for the groundwater survey and that the static GPS survey (accuracy of the elevation measurements is about 75 mm in this case) is indispensable for obtaining precise regional groundwater table.

### 3. Characteristics of regional water table in the Yellow River delta

Obtained data show the decrease of water table elevation from the Yellow River to the coast, indicating that the Yellow River water is recharging at least to the shallow groundwater (Figs. 4 & 5). The comparison between regional groundwater table at September 2003 and that at May 2004 showed the water table drop from September to May (Fig. 6). Our results also suggested that the groundwater potential of the shallower wells was higher than that of the deeper (20 m) wells (Fig. 7). The electric conductivity values of shallower wells are significantly lower than those of deeper wells (Fig. 8). Previous geological study (Xue et al., 1995) showed that upper 4 to 5 m of the sediments in the studied area is composed of upper delta plain facies. On the other hand, the



conductivity values together with the geological information suggest that the different hydrogeological systems exist in the Yellow River delta area.

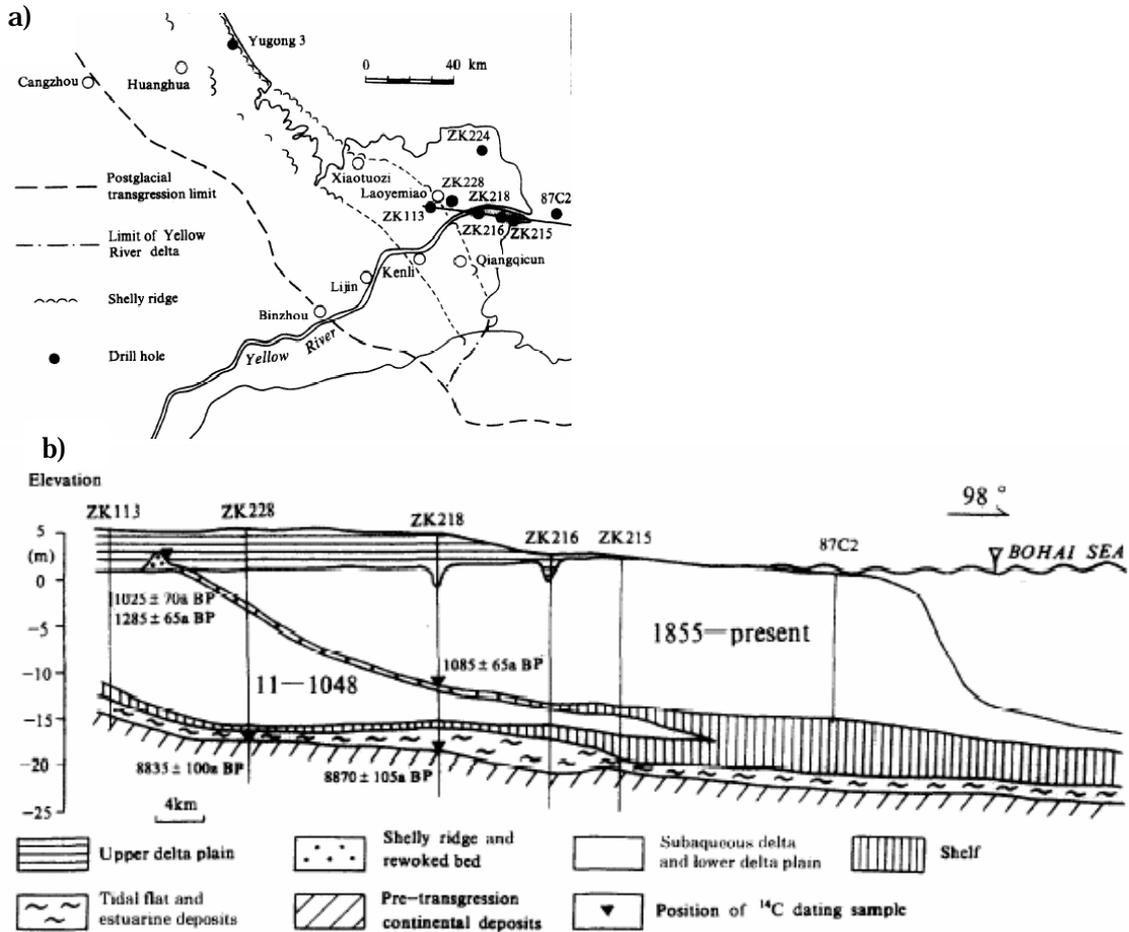

**Fig. 9** Cross-section through the modern Yellow River delta showing the Holocene sedimentary sequence (b). See (a) for location of the section. After Xue et al. (1995).

### References

- Burnett, W. C., Bokuniewicz, H., Huettle, M., Moore, W. S. and Taniguchi, M., 2003, Groundwater and pore water inputs to the coastal zone. *Biogeochemistry*, 66, 3-33.
- Taniguchi, M., Burnett, W. C., Cable, J. E. and Turner, J. V., 2002, Investigation of submarine groundwater discharge. *Hydrol. Proc.*, 16, 2115-2129.
- Xue, C., Zhu, X. and Lin, H., 1995, Holocene sedimentary sequence, foraminifera and ostracoda in west coastal lowland of Bohai Sea, China. *Quat. Sci. Rev.*, 14, 521-530.

## **Some unique results on interaction of groundwater and surface water in the Yellow River delta**

**Shin-chi Onodera\*1, Kunihide Miyaoka\*2, Mitsuyo Saito\*1, Tomotoshi  
Ishitobi\*3, Makoto Taniguchi\*4, Jianyao Chen\*5, and Guanqun Liu\*6**

\*1: Hiroshima University, Japan

\*2: Mie University, Japan

\*3: Nara Education University, Japan

\*4: Research Institute for Humanity and Nature, Japan

\*5: Sun Yat-Sen University, China

\*6: Ocean University of China, China

### **Introduction**

Yellow River has kept the condition with a shortage of the river water since 1990's in the downstream area. To confirm this influence on groundwater environment in the delta area and Bo-Hai Sea, our intensive research have begun since 2003 (Taniguchi et al., 2004). At our first intensive research, we had some problems as follows: interaction of delta sedimentation and displacement of water, nutrient flux from the groundwater to the sea, and some environmental effects on groundwater condition such as groundwater contamination, seawater intrusion and groundwater decline. Based on the researches in 2003, we had shifted our view from general and wide hypothesis to detail and unique one. The results of groundwater level measurement, water quality, and resistivity measurement in 2003 indicated the heterogeneous flow and saltwater intrusion. In addition, we confirmed heterogeneous interaction of river, groundwater and saltwater depend on the topography and land use, using piezometer method. We also got a result on the displacement rate of the salt water to pure water, using soil sampling method at the one observation line. These results were presented at WPGM (Miyaoka et al., 2004) in Hawaii and AOGS (Onodera et al., 2004) in Singapore, and the preparation of publish is also advancing. But we could not determine the mechanism of heterogeneous phenomena. The spatial variation in displacement rate could not consider also. Therefore, we needed to continue our research with the focused view.

In this year, we conducted twice of intensive research in May and September. Our general objective is continued, but we have some detail objectives; to confirm the mechanism of heterogeneous flow of groundwater, to compare the displacement rate of the new observation line with that in 2003, to confirm the seasonal variation in

groundwater quality, to evaluate the seawater intrusion to groundwater. In this newsletter, we want to introduce some unique results in our intensive researches in 2004. These results also will be published in 2005.

## 2. Method

Our research was conducted from May 6 to May 16 and from September 13 to September 23 in 2004. In our former research, we conducted groundwater measurements and water collections at about 50 wells or boreholes where we collected samples in last year (Taniguchi et al., 2004). Those are shown as solid dots in Fig.1. In addition, resistivity tests and soil profile collections were carried out at the northern observation lines (YN; N1-N5 in Fig.1) and southern line (YS2 in Fig.1).

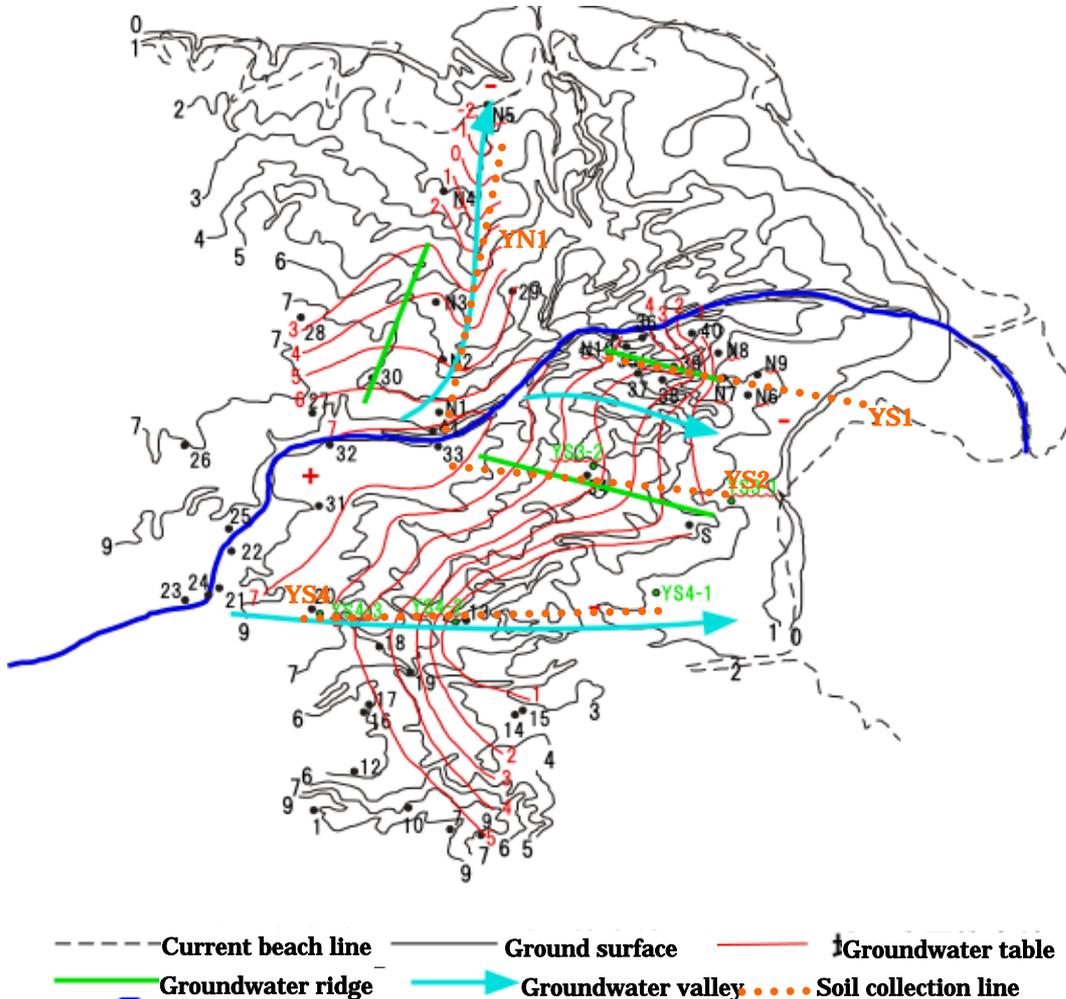


Fig.1 Topographic and groundwater table map and locations of observation sites.

In our later research, we conducted the chemical profile measurements and water


samplings in ten wells or boreholes at the south side area of the river. In addition, the resistivity tests and soil profile samplings were carried out at the palaeovalley line and palaeoridge line where we detected by the topographic map and groundwater table map (YS3 and YS4 in Fig.1). We also measured water levels and collected water samples at piezometers located in the riverside area (N10) and seaside area (N9) where we constructed those in last year at both research periods.

Water samples were analyzed in the laboratory for inorganic ions, stable isotopes, and radioisotope as 2003. In addition, we extracted soil samples by the distilled water and 1N  $\text{NH}_4^+$  solution, and the solutions were analyzed for inorganic ions. A part of the results of analysis in 2004 has not been completed.

### 3. Results and Discussion

#### *Groundwater table figuration*

Fig.1 shows the groundwater table map in the delta in September 2003. Groundwater table is high at the riverside or upstream area. Groundwater flow is generally from the river to the sea. However, groundwater table is lower than the sea level at the northern area (N5). It means the seawater intrusion. In addition, we can find the micro-relief of

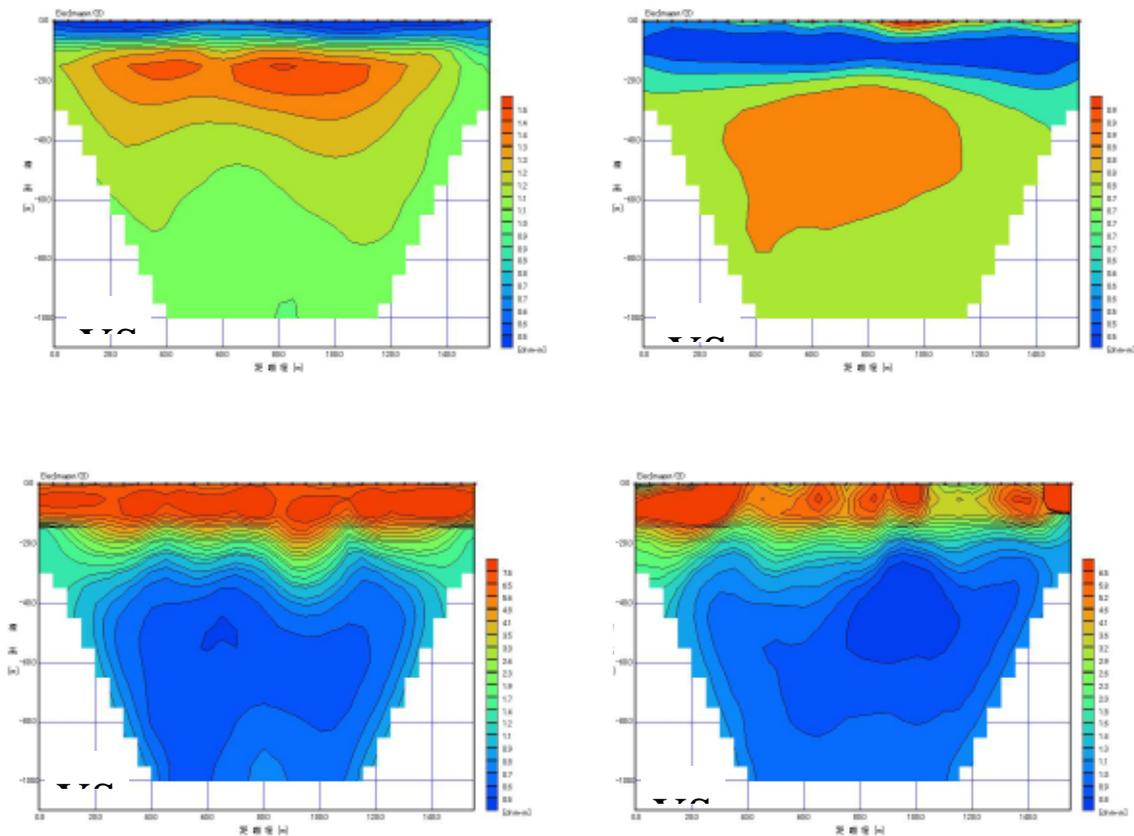


**Fig.2** Resistivity profiles at YS3 (palaeoridge) and YS4 (palaeovalley) lines.

the groundwater table. There are one pair of valley and ridge in the northern area of the delta and two pairs in southern area (YS4 and YS3). This type of the micro-relief is negligible in terms of the horizontal groundwater flow in case of the homogeneous porous medium. However, if the valley of groundwater is a palaeovalley, the medium is composed of sandy sediment and muddy sediment in the palaeoridge. That means the large difference in terms of the permeability. On the other hand, seawater tends to intrude into the palaeovalley. Consequently, we suggest that such micro-relief of groundwater is a significant indicator of the nutrient transport or seawater intrusion in the seaside area.

*Resistivity profile at the palaeovalley and palaeroidge*

Fig.2 shows resistivity profiles at the two measurement lines. YS3 line is on the ridge of the groundwater and YS4 is on the valley, and YS3-1 is located on the seaside. In this figure, the color range from the blue to the red represents the resistivity range from the seawater condition or compact sediment with the low value to the pure water condition or loose sediment with high value. The horizontal axis is the horizontal distance of 160m and the vertical axis is the depth of 100m. The horizontal variation in the resistivity is negligible, whereas the vertical variation is large and two layers appear. The resistivity profile at a palaeovalley is high at the surface layer and low at the deeper. In contrast, the palaeoridge has the inverse profile. This suggests the high displacement rate of seawater to the pure water with the groundwater flux or existence of compact sediment in the surface layer at the palaeovalley. In general, because the permeable sandy sediment buries the palaeovalley, the groundwater

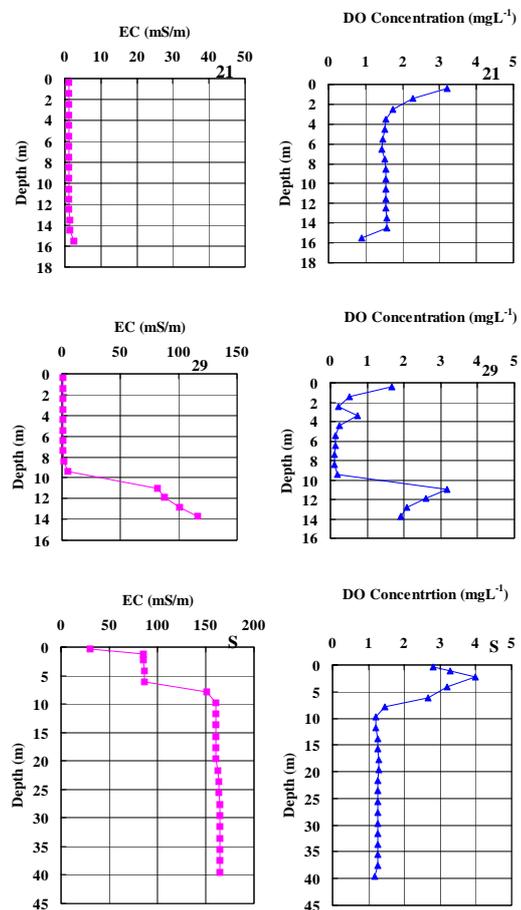

**Fig.4** Profiles of electrical conductivity and dissolved oxygen concentration in the boreholes at the riverside (21), the palaeovalley (29), and seaside site (S). Y axis shows the depth below the groundwater table.

flux would be large there. On the other hand, it is a high possibility that seawater tend to intrude into older sediment layer under the palaeovalley because of the low altitude and seawater going to upstream. These trends agree with the resistivity profile. However, we need to confirm whether high salt content water is palaeo-seawater or current seawater with considering the adsorbed content.

*Chemical profiles in the boreholes*

We conducted the chemical profile measurements at 7 various boreholes by the portable chemical meter (temperature, EC, pH, DO, pressure) and we collected water samples at two or five various depths in each borehole and more 3. Fig. 4 shows the profiles of electrical conductivity and dissolved oxygen concentration at 3 boreholes. One is No.21 at the riverside of western delta, No.29 at the palaeovalley and No.S at the seaside. We represent Y-axis as the depth below the groundwater table. The average EC in the borehole increases from 1mS/m at the riverside to 150mS/m at the seaside. The EC also increases from shallow to deep in the borehole. At the palaeovalley, the EC was very low in the shallow zone of less than 10m but rose up to more than 50mS/cm in the deeper zone. This profile coincides with the resistivity profile. However, the DO concentration is high in the deeper. Because here is so far from the beach, the source of oxygen in the deeper water is not made clear. At the seaside area, the EC exceeded 150mS/cm and this value is equal to be three times of seawater in the deeper zone. This borehole is located at the salt production field with the area of wider than 1km<sup>2</sup>. The high salt content suggests the density flow of enriched seawater to downward. It is necessary to evaluate the source and formation mechanisms of this extremely salty water. As described above, the chemical profile in the boreholes supported the existence of salty groundwater suggested by the resistivity measurements. But we also need to check the geologic profiles in the area.

*Variation in chemical property from the river to the sea*

The chemical properties of soil profiles were also analyzed after collecting at two palaeoridge and two palaeovalley lines. Fig.5 shows adsorbed cation content and ratio of Na and Ca at the 7 plots on the

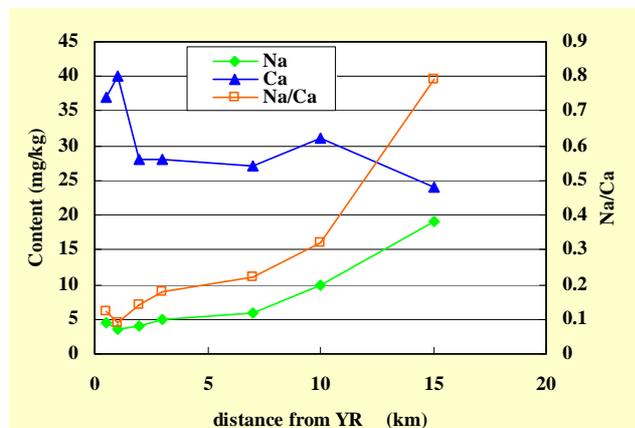


Fig.5 Adsorbed cation content and ratio of Na and Ca from the river (near N10) to the seaside (near N9) on the YS1.

line (YS1) of 15 km from the river (near N10) to the seaside (near N9). We collected soil samples at the 50cm intervals from the ground to the depth of 3m to 4m at each plot. The groundwater table was the depth of 1m to 2m below the ground. Each value in Fig.5 is an average of all values of samples below the groundwater table. The results at a palaeoridge line indicated the continuous trend of displacement from the riverside to seaside. Adsorbed cation extracted by  $\text{NH}_4^+$  solution was composed of  $\text{Na}^+$  in the seaside area, while it was  $\text{Ca}^{2+}$  in the riverside area. This means that the displacement from  $\text{Na}^+$  to  $\text{Ca}^{2+}$  occurred in the inland area. Using the simple water balance model, the displacement rate was estimated to be 20 years at 15km of inland from the beach. It is similar to the sedimentation age. However, adsorbed  $\text{Na}^+$  content at the 15km from the beach was only one sixth of the value of seabed sediment. This high content coincides with the resistivity property in the surface layer. This means that the soil keeps high  $\text{Na}^+$  content as the adsorbed condition in the soil. We need to compare such results with those in the palaeovalley.

#### **4.. New tasks to the next year**

Based on our intensive researches in this year, we confirmed some unique results. The heterogeneity of groundwater flow environment and its influence on the displacement rate were so significant facts for the determination of nutrient flux and seawater intrusion in the delta area. However, we also found some tasks. Those are the confirmations of seasonal variation and spatial variation mechanisms in the groundwater flow and nutrient transport as irrigation, land use and palaeo-hydrogeomorphological process, deeper groundwater flow in both the area under the palaeovalley and palaeoridge, heterogeneous nutrient flux to the sea, and the relationship between groundwater flux and Yellow river. Consequently, we need more 4 boreholes at the sites where we conducted resistivity measurements at least.

On the other hand, we have so many other data, which we could not introduce here. For example, those are the automatic data of piezometric head, temperature and conductivity at the new boreholes, seasonal variation in chemical component and isotopic component of groundwater. In addition, we have not discussed the relationship between the groundwater environment and groundwater discharge characteristics etc. Therefore, we will get more results after additional analysis and discussion.

#### **References**

- Miyaoka et al. (2004): Abstracts of WPGM in Hawaii.
- Onodera et al. (2004): Abstracts of AOGS in Singapore.
- Taniguchi et al.(2004) : News letter Vol.2 in YRiS Project, 22-26

V List of related meetings

(1) **2<sup>nd</sup> International Workshop of the Yellow River Studies**

**November 8-10, 2004, Kyoto, Japan**

Organizers: Yoshihiro Fukushima (RIHN) and Changming Liu (CAS)

(2) **Coordinating Committee for Geoscience Programmes (CCOP) in East and Southeast Asia Meeting**

**November 15-18, 2004, Tsukuba, Japan**

(3) **Global Water System Project (GWSP) Consultation Workshop**

**December 6-7, 2004, Bonn, Germany**

Organizer: GWSP <http://www.gwsp.org/>

---

---

**Yoshihiro Fukushima, Project Leader**

**Makoto Taniguchi, Secretary General**

Research Institute for Humanity and Nature (RIHN),

Inter-University Research Institute Corporation, National Institutes for the Humanities

-----  
335 Takashima-cho, Kamigyo-ku, Kyoto 602-0878, Japan

Tel: +81-75-229-, Fax: +81-75-229-6150

E-mail: [YRiS@chikyu.ac.jp](mailto:YRiS@chikyu.ac.jp), URL: [http://www.chikyu.ac.jp/index\\_e.html](http://www.chikyu.ac.jp/index_e.html)

---

---